

TRUE BLUE POWER

250VA DC-to-AC Inverter

TI250 Series

Manufactured by Mid-Continent Instrument Co., Inc.

The TI250 Series Inverters supply 250 watts of power to instruments, avionics, and multiple cabin accessories, including laptops, tablets and cell phones.



The highly efficient TI250 Series DC-to-AC Inverters produce 250 watts of power from an aircraft's 28 VDC input. Engineered to run cooler and featuring a fanless design, the TI250 Series saves energy and reduces weight. These inverters are lighter and smaller than competing units and include overload, short-circuit and ground fault interrupter protection.

The primary stage of the TI250 Series utilizes current mode control for increased reliability and safety, similar to most military design requirements.

Product features

OUTPUT POWER	250 VA
INPUT VOLTAGE	20 – 36 VDC
OUTPUT VOLTAGE	TI250 (P/N 6430250-1) 115 VAC \pm 3% TI254 (P/N 6430250-2) 115 VAC \pm 3% TI256 (P/N 6430250-3) 115/26 VAC \pm 3%
OUTPUT FREQUENCY	TI250 (P/N 6430250-1) 60 Hz \pm 0.1% TI254 (P/N 6430250-2) 400 Hz \pm 0.1% TI256 (P/N 6430250-3) 400 Hz \pm 0.1%
EFFICIENCY	87 – 90%
REMOTE CONTROL	Remote On/Off Fault output indication
OVERLOAD AND SHORT-CIRCUIT PROTECTION	Input transient, overload, short-circuit protection (up to 150% of rated load without damage) and GFI (ground fault interrupter) protection
DESIGNED AND MANUFACTURED	Wichita, Kansas, USA
WARRANTY	Two-year limited

Kansas

9400 East 34th Street North
Wichita, Kansas 67226 USA
Tel 316.630.0101 800.821.1212
Fax 316.630.0723
tbp@mcico.com

California



9722 Topanga Canyon Boulevard
Chatsworth, California 91311 USA
Tel 818.786.0300 800.345.7599
Fax 818.786.2734
tbp@mcico.com

truebluepower.com

250VA DC-to-AC Inverter

TI250 Series

Manufactured by Mid-Continent Instrument Co., Inc.

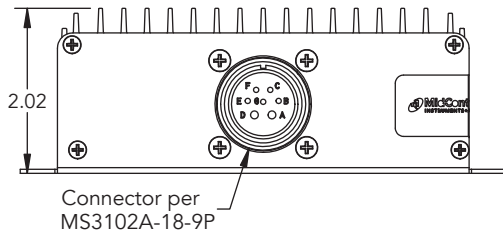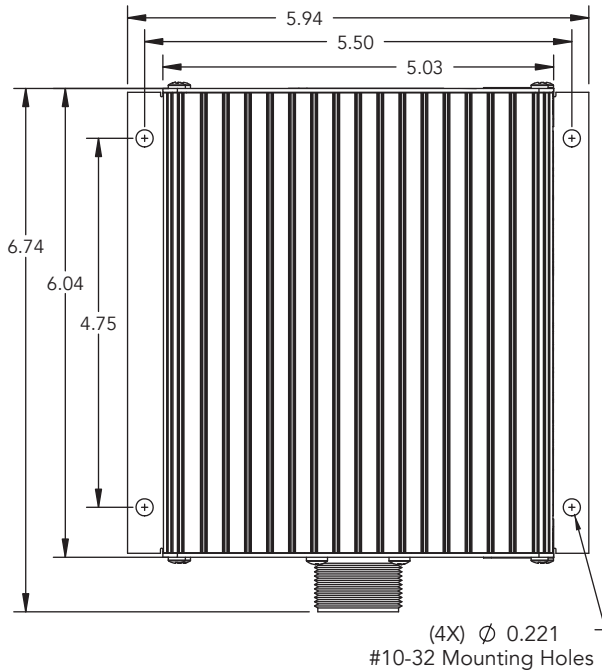

Technical specifications

INPUT VOLTAGE	20 – 36 VDC	
INPUT CURRENT	10A at 28 VDC input	
OUTPUT VOLTAGE	TI250 (P/N 6430250-1)	115 VAC ± 3%
	TI254 (P/N 6430250-2)	115 VAC ± 3%
	TI256 (P/N 6430250-3)	115/26 VAC ± 3%
OUTPUT POWER	250 VA	
OUTPUT FREQUENCY	TI250 (P/N 6430250-1)	60 Hz ± 0.1%
	TI254 (P/N 6430250-2)	400 Hz ± 0.1%
	TI256 (P/N 6430250-3)	400 Hz ± 0.1%
OUTPUT WAVEFORM	Single phase, pure sine wave, < 2% total harmonic distortion	
POWER CONVERSION METHOD	Current mode control	
WEIGHT	TI250	2.2 lbs (1.0 kg)
	TI254	2.2 lbs (1.0 kg)
	TI256	2.6 lbs (1.15 kg)
ALTITUDE	70,000 ft	
HUMIDITY	Tested to greater than 95% for 10 days, temperature cycle of 100°F to 150°F	
TEMPERATURE	-67°F to +158°F (-55°C to +70°C)	
MATING CONNECTOR	MS3106A-18-9S (MCI P/N 9016905-1, -2)	
CASE	Anodized aluminum extrusion, blue	
CERTIFICATION	FAA TSO-C73 certified RTCA DO-160G qualified	

AC Outlet Option

Part Number	Compatibility	Current Rating	Weight	Dimensions	Connector	Case
9018708-1	North American	15 amps	0.3 lbs (0.14 kg)	1.75"W x 1.75"H x 1.7"D	Mate-N-Lok	Aluminum
9018708-2	Universal	14 amps	0.49 lbs (0.22 kg)	2.30"W x 2.30"H x 1.94"D	Mate-N-Lok	Aluminum